

# CONTROLLERS RAIN/FREEZE SENSORS

## RFS5

Wireless Rain/Freeze Sensor

### FEATURES

- Compatible with both ProLine® and SmartLine® controllers
- Rain shut-off settable from 1/8 - 1" (3 - 25 mm)
- Extended rain delay adds time to rain events before deficits begin to accumulate
- Unit can be mounted in sunlight or shade and in close proximity to the roof-line
- On-board diagnostics indicate battery and communication status
- Remote battery strength measurement from the SmartLine® or ProLine® controller
- 10-Year battery life (AAA lithium)
- Adjustable arm metal bracket for gutter thumb-screw or wall mount
- Operates on 900MHz frequency for superior range and reliability
- Maximum wireless distance from controller to sensor is 1500' (457 m) line of site.
- SLHUB-RF-5 wireless hub included with RFS5
- Freeze shut-off activated at 37°F (3.0°C)

### RFS5 SPECIFICATIONS

MODEL	DESCRIPTION
RFS5	Wireless Rain/Freeze Sensor 900 mhz - 1500' Line of Site Range
RFSHUB-5	Wireless Receiver - Included with RFS5




## 420GLS

Wired Rain/Freeze Sensors

### FEATURES

- Rain shut-off settable from 1/8- 1" (3 - 25 mm)
- Tough UV-stabilized plastic housing
- Replaceable absorptive disks
- No-rust extruded aluminum bracket - mounts anywhere
- UL-listed watertight switch provides years of reliable service works with virtually all 24VAC controllers
- Each unit factory tested
- 35 feet of cable provided

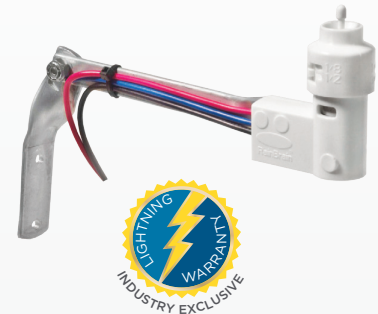

### 420GLS SPECIFICATIONS

MODEL	DESCRIPTION
420GLS	Wired Rain Sensor (20' of cable)

