



# SMARTLINK® COMMERCIAL WIRELESS

## SmartLink® Commercial Wireless

## Affordable, Web-Based Irrigation Management

### Professional Features

- LTE CAT M1 Cellular communication
- Unlimited accounts
- Assignable account privileges
- Unlimited sites
- Unlimited controllers
- Web browser accessible
- Map integration
- Search Filters
- Single page controller overview
- Manual zone/program operation
- Recent event list (export to .xlsx)
- Valve locator
- Basic programming (mirror SmartLine/ProLine features)
- Advanced "Smart" programming (mirror SmartLine features)
- Historical water use reports
- Historical temperature overlays
- Total gallons used per site/controller/zone
- Daily or monthly summary

### Alerts

- Turn ON email alerts
- Set alerts to arrive instantly or daily
- Manage alerts globally
- Setup over 20 different notification types

### Inspection Reporting

- Run zones remotely
- Track issues and quantities
- Upload photos for issues
- Include comments and descriptions
- Review program settings
- Set programming adjustments
- Save inspection reports to clients
- Export reports to PDF, XLSX, or XLS

### Asset Tagging

- Create site layouts with satellite mapping
- Draw zone outlines
- Pin locations for items such as meters, valves, sensors, controllers, and more
- Include detailed notes
- Upload photos
- Save meter and product serial numbers
- Drag-in-drop any related files

### Global Commands

- Turn ON or OFF all controllers
- Set a Rain Delay
- Clear Faults
- Pull a receive for real-time updates
- Reset a controller
- Take a Snapshot of all program settings

### Requirements

- SmartLine controller (Firmware 3.10) with SmartLink Aircard installed.
- Service plan fee



### Reports

- Run Times
- Water use (with flow data)
- Local high and low temperatures
- System or programming related changes
- Daily, Weekly or Monthly changes

### Proposals



- Track repair issues
- Maintain a repair parts catalog
- Update price lists
- Create proposals
- Send proposal approval emails to clients

### Flow Sensing

- Self-defined high and low flow limits
- Automatic master and zone valve shutdowns
- Email alert notifications
- Running and Current Averages
- (Flow aircard/sensor required)

### Snapshots

- Track minor program adjustments
- Store settings for historical reasons
- Reapply settings at a later time
- Compare differences between two programs

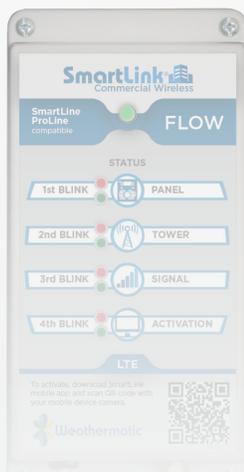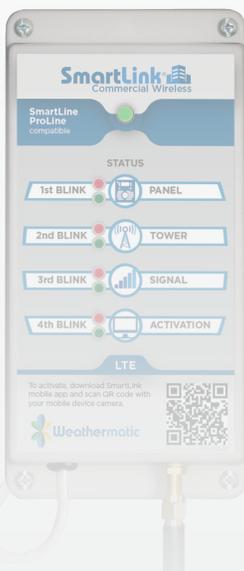

Save Water. Give Life.

Learn more

[weathermatic.com/our-cause](http://weathermatic.com/our-cause)





# SMARTLINK® COMMERCIAL WIRELESS



## SL-AIRCARD

SmartLink® Aircard

### FEATURES

- Connects the SmartLine® controller to the SmartLink®™ web application
- Provides Web-Based control from a computer, tablet, or smartphone
- Simple to install
- Set-up in minutes
- Automatic firmware updates
- Status LED
- Gold plated antenna connection
- Cellular-Based communication
- Indoor/Outdoor use


### FLOW AIRCARD FEATURES

- Adds Flow capabilities
- Flow Sensor connects directly to unit and not the SmartLine® controller



SMARTLINK AIRCARD SPECIFICATIONS	
MODEL	DESCRIPTION
SL-AIRCARD-M1NA	SmartLink Aircard for LTE CAT M1 Cellular Network (No Plan)
SL-AIRCARD-M1NA-EXT	SmartLink Aircard for LTE CAT M1 Cellular Network with 50ft Extension (No Plan)
SL-AIRCARDFLOW-M1NA	SmartLink Aircard with flow for LTE CAT M1 Cellular Network (No Plan)
SL-AIRCARDFLOW-M1NA-EXT	SmartLink Aircard with flow for LTE CAT M1 Cellular Network with 50ft Extension (No Plan)

## Aircard Mount Antenna



### SL-ANT-LTE

SmartLink® Aircard Standard Antenna

### FEATURES

- Standard no gain antenna included with SmartLink® Aircard
- Omni directional
- Mounts directly on SmartLink® Aircard
- Suitable for most SmartLink® Aircard locations



STANDARD ANTENNA SPECIFICATIONS	
MODEL	DESCRIPTION
SL-ANT-LTE	SmartLink® Aircard M1NA Antenna LTE

## Pedestal Mount Antenna



### SL-HG-ANT-LTE

High Gain Antenna, LTE

#### DIMENSIONS

1.7" diameter x 3" WH  
(43 mm x 76 mm)

### FEATURES

- Heavy duty screw mount
- L-shaped bracket
- UV and vandal resistant
- ABS housing and thread
- IP67 compliant
- Includes 3 ft cable
- Peak Gain: 1.2 dBi @ 700-960 MHz



SL-HG-ANT-LTE ANTENNA SPECIFICATIONS	
MODEL	DESCRIPTION
SL-HG-ANT-LTE-3FT	High Gain Antenna with 3 ft. cable, LTE



Save Water. Give Life.

Learn more

[weathermatic.com/our-cause](http://weathermatic.com/our-cause)